

Fire and Burglary Resistant Safes / Feuer- und Einbruchssichere Tresore

VALBERG

series: **FSB**

grade: **S2, LFS 60P**

Serie: **FSB**

Klasse: **S2, LFS 60P**



MULTI
LAYER SYSTEM




FSB 1993

model									
FSB 32	345	480	460	185	332	300	1	66	18
FSB 46	490	480	460	330	332	300	1	85	33
FSB 67	670	480	460	510	332	300	1	108	51
FSB 12130*	1200	1250	585	1030	1110	390	4	440	445
FSB 19130*	1950	1250	585	1785	1110	390	2	650	773
FSB 1993	1950	940	585	1760	801	392	4	457	553


* Made to order / Herstellt auf Bestellung



Key lock /
Schlüsselschloss



Digital lock /
Elektronischschloss

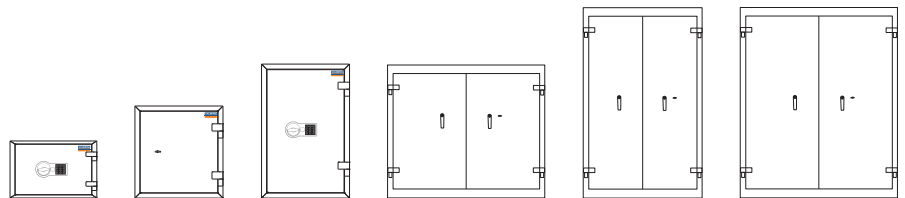

FSB 32

FSB 46

FSB 67

FSB 12130

FSB 1993

FSB 19130

- Designed to protect documents and valuables in case of fire or burglary.
- Burglary resistance – S2 according to EN 14450.
- Fire resistance – LFS 60P according to EN 15659.
- Thickness of door - 105mm.
- Thickness of walls - 77mm.
- Thickness of rear wall – 51mm.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- 3 live-locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor is available.
- Color: RAL 7035 (light grey).

- Zum Schutz von Dokumenten und Wertsachen gegen Feuer und Einbruch.
- Einbruch-Sicherheit – S2 nach EN 14450.
- Feuerwiderstand – LFS 60P nach EN 15659.
- Türstärke – 105 mm.
- Wandstärke – 77 mm.
- Rückwandstärke – 51 mm.
- Doppelwandige Gehäusen und Türen gefüllt mit feuersicherem Beton.
- 3-seitiger Verschluss.
- Integrierter Relocker, Schloss bohrgeschützt.
- Serienmäßig Doppelbart-Hochsicherheitsschloss mit 2 Schlüsseln.
- Befestigung am Fußboden.
- Farbe: RAL 7035 (lichtgrau).