

# Feuer- und Einbruchssichere Tresore

series: **GARANT**

grade: **I, LFS 60 P**

Serie: **GARANT**

Klasse: **I, LFS 60 P**



model										
Garant 46	490	480	455	330	332	295	1	8	106	33
Garant 67	670	480	455	510	332	295	1	8	136	49
Garant 75	750	555	547	590	407	388	1	9	193	93
Garant 95	980	545	455	820	400	295	1	9	205	94
Garant 110	1100	555	547	940	407	388	2	10	287	148
Garant 133	1336	701	580	1142	527	388	2	10	413	233
Garant 165	1652	701	580	1459	527	382	3	11	501	298
Garant 1993	1950	940	585	1760	801	392	4		658	



Key lock /  
Schlüsselschloss




Mechanical combination lock/  
Mechanisches  
Zahlenkombinationsschloss




Digital lock /  
Elektronischschloss


**GARANT 95**




**GARANT 46**




**GARANT 67**




**GARANT 75**




**GARANT 95**




**GARANT 110**

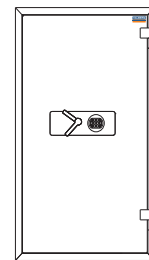

**GARANT 133**

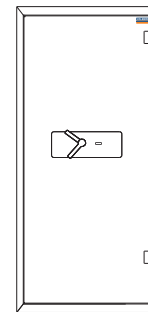

**GARANT 165**

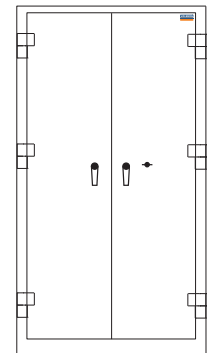

**GARANT 1993**

- Designed to protect documents and valuables in case of fire or burglary.
- Burglary resistance – EN 1143-1, Grade I.
- Fire resistance – LFS 60P according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- 3 live-locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor is available.
- Color: RAL 7024 (grey graphite), also available in RAL 7035 (light grey).

- Zum Schutz von Dokumenten und Wertsachen gegen Feuer und Einbruch.
- Einbruch-Sicherheit – EN 1143-1, Grad I.
- Feuerbeständigkeit LFS 60P gemäß EN 15659.
- Doppelwandige Gehäusen und Türen gefüllt mit feuersicherem Beton.
- 3-seitiger Verschluss.
- Integrierter Relocker, Schloss bohrgeschützt.
- Serienmäßig Doppelbart-Hochsicherheitsschloss mit 2 Schlüsseln.
- Befestigung am Fußboden.
- Farbe: RAL 7024 (graphitgrau) auch in RAL 7035 (lichtgrau) erhältlich.